



OWNER'S MANUAL

SATELLITE WATER FILTRATION SYSTEM FS7025 FS7075 FS7005

Performance Data


Important Notice:
Read this performance data sheet and compare the capabilities of this unit with your actual water treatment needs.

- FEATURES:**
- Filters water through designer filter tap
 - Provides quality filtered water without compromising on flow rate
 - Easy installation and space saving design
 - Compatible with any bench top including solid surface
 - Suitable for vertical or horizontal installation to maximise cupboard space
 - Finely filters to 1 micron and polishes mains water to a premium quality for:
 - Drinking
 - Cooking
 - Tea & coffee
 - Washing fruits & vegetables
 - The latest carbon block filtration technology absorbs:
 - Chlorine
 - Bad tastes
 - Odours
 - Dirt
 - Rust
 - Cysts (e.g. giardia & cryptosporidium)
 - Maintains healthy minerals and salts as well as fluoride
 - Helps to prevent the build up of limescale
 - Simple, easy to change cartridge replacements

| Substance Requirements | Influent Challenge Concentration | Max. Permissible Product Water Concentration | Reduction Requirements | Minimum Reduction | Average |
|------------------------------------|----------------------------------|--|------------------------|-------------------|---------|
| Standard 42 Aesthetic Effects | | | | | |
| Chlorine | 2.0mg/L±10% | 5ppm | ≥50% | - | 98% |
| Particulate Class 1 particles <1um | at least 10,000 | - particles/mL | ≥85% | - | 99.8% |
| Standard 53 Health Effects | | | | | |
| Cyst | Minimum 50,000/L | - | 99.95% | 99.99% | 99.99% |
| Turbidity | 11±1 NTU [†] | 0.5 NTU1 | - | 98% | 99% |

*Tested using flow rate=0.5gpm; pressure=60psig; pH=7.5 ± 0.5; temp=20°C ± 2.5°C [†]NTU=Nephelometric Turbidity Units

Check for compliance with state and local laws and regulations. Product performance is dependant upon incoming water conditions. This drinking water system must be maintained according to the manufacturer's instructions, including replacement of cartridge.



AS3497
Lic.WMKA22045
IAPMO R&T OCEANA

This appliance meets the domestic water treatment appliance Standards AS/NZS3497 for the following water treatment processes:

| CLASS | TREATMENT TYPE | FUNCTION | PASS |
|-------|--|--|------|
| I. | Microbiological Status Bacteriostatic | Will stop bacteria increasing but will not stop them unless IIa is passed. | N/A |
| II. | II (a) Microbiological Treatment Bacteria Removal | Will remove or inactivate bacteria. | N/A |
| | II (b) Virus Removal | Will remove or inactivate virus. | N/A |
| | III (c) Protozoa Removal | Will remove or inactivate Cryptosporidium and Giardia.Will not remove or inactivate bacteria and virus unless II(a) and II(b) is passed. | 3 |
| III. | Turbidity and Particulate Reduction | Reduces Cloudiness | 3 |
| IV. | Taste and Odour Reduction | Reduces Tastes and Odours | 3 |


System tested and Classified by Underwriters Laboratories Inc against NSF/ANSI Standards 42 and 53 for the reduction of:

Std. No 42 - Aesthetic Effects

- Chemical Reduction
- Chlorine
- Taste & Odour
- Mechanical Filtration
- Nominal Particulate Class 1

Std. No 53 - Health Effects

- Mechanical Filtration
- Cyst
- Turbidity



WATER QUALITY
WATER FILTER
ANSI/NSF
STANDARDS
42 AND 53
3LSD

WARNING: FOR CORRECT OPERATION OF THIS APPLIANCE IT IS ESSENTIAL TO OBSERVE THE MANUFACTURER'S INSTRUCTIONS.

- HEALTH CLAIM PERFORMANCE CLASSIFIED BY NSF.**
This system has been tested according to NSF/ANSI 42 and 53 for the reduction of the substances listed below.
- The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42 and 53.
- OPERATING SPECIFICATIONS:**
- Capacity: 9,450 litres
 - Pressure Requirement: 10-125 psi (0.7 - 8.6 bar), non-shock.
 - Temperature: 2-38° C
 - Flow Rate: 0 - 1.9 litres per minute.
- GENERAL INSTALLATION / OPERATION/MAINTENANCE REQUIREMENTS:**
- Space required: 460mm x 225mm (allows space for cartridge replacement)
 - Install cartridge vertically or horizontally with stabilizing support bracket.
 - Flush new cartridge at full flow for 2–3 minutes until air is purged.
 - Replace cartridges when capacity is reached, or when flow becomes too slow, but at least annually.
- SPECIAL NOTICES:**
- Installation instructions, parts and service availability, and standard warranty are included with the product when shipped.
 - This drinking water system must be maintained according to manufacturer's instructions, including replacement of filter cartridges.
 - Do not use with water that is microbiologically unsafe, or of unknown quality without adequate disinfection before or after the system.
 - The contaminants or other substances removed or reduced by the water treatment system are not necessarily in your water.
 - Check for compliance with state and local laws and regulations.

Distributed by:

INSTALLATION INSTRUCTIONS

1. Open Carton and Inspect Parts.

| | |
|---|-----|
| Parts included – refer installation diagram | |
| Item No. | |
| Cistern Tap 1/2" fbsp x 1/2" mbsp | (1) |
| Dual Check Valve 1/2" fbsp x 1/2" mbsp | (2) |
| Pex Hose 750mm | (3) |
| Head Assembly | (4) |
| Filter Cartridge | (5) |
| Pex Hose 550mm | (6) |
| Filter Tap | (7) |
| Filter Monitor Alarm | (8) |
| Mounting Screws | (9) |

IMPORTANT NOTES

- When installing this filter system in a new home or kitchen please ensure that the cold water lines under the sink are flushed to remove all debris within the pipes, before installation of the water filter system.
- This Water Filtration System should be installed in accordance with any local Water Authority by-laws. **Australian Standard AS3500**
- Where water pressure exceeds 860 kPa a suitable pressure limiting valve should be installed prior to connection to the filter system.

2. Connect to Water Supply


It is advisable to turn off the water supply at the mains before commencing installation.

Check to see if separate water connection is provided.

IF A SEPARATE WATER CONNECTION IS NOT PROVIDED

- Locate the cistern tap mounted on the wall underneath the sink for the existing cold water line.
- Turn off isolation cistern tap and disconnect attached fittings.

CONNECTION DIAGRAM



Attach the following parts to the existing cistern tap according to the Connection Diagram below
Using plumbing tape:

- Attach the following parts to the cistern tap according to the Connection Diagram below.
Brass Female Tee 1/2" BSP*
Brass Nipple 1/2" BSP – 1/2" BSP (x2)*
Cistern Tap supplied
- Reconnect the cold water line to the available 1/2" connection. Firmly tighten all connections

3. Undersink Mounting Position

This Water Filter System can be installed in either the horizontal or vertical position.

- a) *Vertical Installation*
Measure 460m from the base of the cabinet (or shelf), and mark the mounting location for the top of the filter head. Make sure that there is adequate space to avoid crimping the water line flex hoses. Also make sure your chosen location offers easy access for future cartridge changes.

- b) *Horizontal Position* Measure 460mm horizontally, and mark the mounting location for the side of the filter head and end of the filter cartridge. Make sure that there is adequate space to avoid crimping the water line flex hoses. Also make sure your chosen location offers easy access for future cartridge changes.

4. Important - If necessary you can easily change the direction of the flow of water through the inlet and outlet of the filter system. You will notice on the head assembly that the inlet is shown by the word "IN" and the outlet is shown by the word "OUT". To change direction, simply remove the four (4) screws that hold the mounting bracket to the head assembly and replace/refit the mounting bracket in the opposite direction. This allows flexibility when choosing the desired location for your filter system.

- a) Apply plumbing tape to the Pex Hose 3/8" male connection (item 3). Wrap tape in direction of the thread to ensure a tight fit and avoid leaks. Screw this connection to the inlet side of the filter head assembly (item 4). Repeat same for the Pex Hose (Item 6) on the outlet side of the Head Assembly (Item 4)

- b) Securely mount the Filter Head Assembly

(item 4) on the cabinet wall using two of the mounting screws (item 9) provided.

5. Connect Dual Check Valve – (item 2)
IMPORTANT – It is a legal requirement under Australian Plumbing Standards that the Dual Check Valve be installed. If this part is not installed all warranties are null and void.

- a) Apply plumbing tape to the 1/2" male connection on the outlet of the existing cistern tap. Wrap tape in direction of the threads to ensure a tight fit and avoid leaks. Screw on the Dual Check Valve (item 2) and secure.

6. Attach Pex Hose (item 3)
Connect the 1/2" female end of the Pex Hose (item 3) to the 1/2" male end of Dual Check Valve.

7. Install the Filter Tap (refer diagram)
Assemble and mount the tap. Tighten locking nut beneath the sink to secure the tap firmly in position. If a hole for the filter tap is not provided, then use a drill or hole cutter to cut a 12.7mm (1/2") hole in the sink or counter top where the tap is to be located.

Please ensure that you use plumbing tape when connecting the chrome brass adaptor to the bottom of the filter tap.

8. Attach Filtered Water to Cold Water Line of Filter Tap

Take the braided pex hose from the outlet of the head assembly and connect to the chrome brass adaptor at the bottom of the filter tap.

9. Flush the Filter Cartridge

- a) Turn water supply back on at either the mains or at the cold water mini cistern tap.
- b) At this stage check for leaks and fix if necessary
- c) Turn kitchen tap on and flush the filter cartridge for at least 2–3 minutes. Collect water in container and use for garden etc.

NOTE – Flushing the filter cartridge is important to remove air from the system and any loose carbon powder. At first the water may appear cloudy due to compressed trapped air in the filter and hoses. However the cloudiness will disappear over time and with use.

10. Installing the Filter Monitor Alarm (item 8)

The filter monitor alarm (item 8) is supplied to assist you with knowing when it is time to replace your filter cartridge. Regular annual cartridge



replacement ensures that your filter system is maintained in accordance with the manufacturers recommendations.

- a) Remove plastic wrapper from monitor and remove installation instructions.
- b) On the back of the monitor - pull the tab back.
- c) The LED and buzzer will cycle 3 times to confirm the start.
- d) It is programmed to flash and sound again in 11 months.
- e) Remove the two adhesive tapes from the back of the monitor and locate/mount in a convenient location under your kitchen sink.

NOTES

- 1) **This installation must comply with all applicable state and local regulations.**
- 2) **Do not use with water that is microbiologically unsafe or of an unknown quality without disinfection before or after the system.**
- 3) **When storing filtered water in a refrigerator please ensure the container has an air tight seal / lid.**

TAP INSTALL DIAGRAM

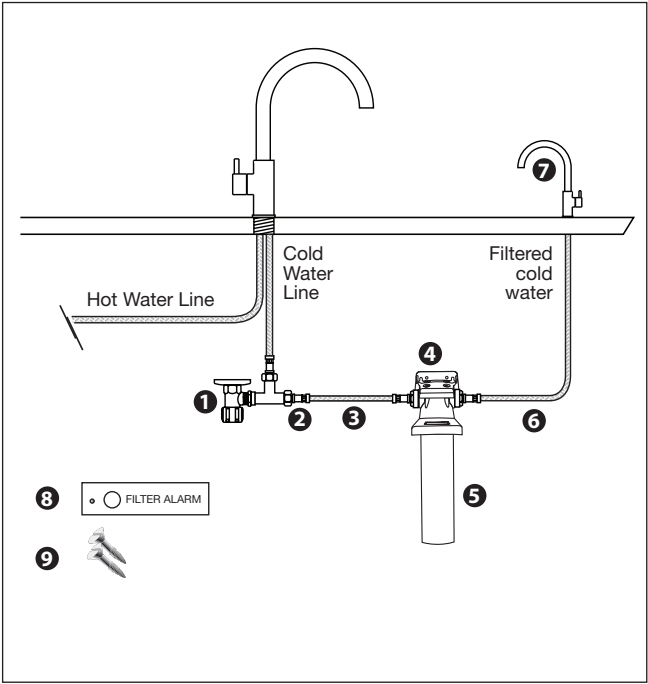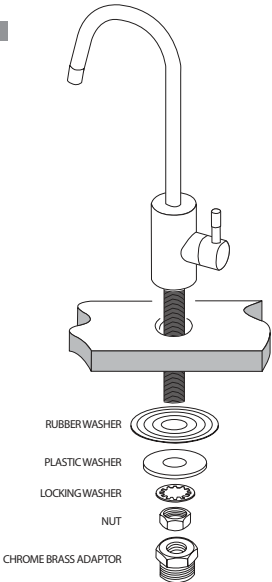

- | | |
|--|--------------------------|
| (1) Cistern Tap 1/2" fbsp x 1/2" mbsp | (6) Pex Hose 550mm |
| (2) Dual Check Valve 1/2" fbsp x 1/2" mbsp | (7) Filter tap |
| (3) Pex Hose 750mm | (8) Filter Monitor Alarm |
| (4) Head Assembly | (9) Mounting Screws |
| (5) Filter Cartridge | |

WARRANTY

Product Specifications: *The unit must only be used for a portable water source and with cold water (with a temperature range between 2 and 38° C).*

Tasman Sinkware warrants to you, the first person who has purchased and used the unit ("you") that this unit is free from defects due to faulty material and workmanship in accordance with the conditions set out in this document. This warranty is provided to you in addition to your rights at law, including but not limited to your rights under the Trade Practices Act 1074 (Cth) and applicable legislation in your Australian State or Territory.

What this warranty covers:

This warranty covers defects due to faulty material and workmanship of the unit supplied to you:

- For a period of 6 years from the date of purchase in respect of the entire unit, excluding the Replaceable Elements. The Replaceable Elements are consumable components and all parts of the unit which can be

replaced including but not limited to the filter or water treatment cartridge if there is a defect in the filter or cartridge. This does not include the replacement of the filter or cartridge to extend the life of the filter or cartridge. The life of the filter cartridge is affected by water quality, usage and water pressure. The warranty only extends to the original purchaser of the unit.

What this warranty does not cover:

This warranty does not cover the unit or a Replaceable Element of the unit where:

- The defect, fault or failure is attributable, or substantially attributable to misuse, abuse, accident, misapplication, neglect, freezing, oxidizing agents (including but not limited to chlorine, ozone, chloramines and other related components) or act of God;
- The unit has been in conditions which do not conform to the recommended design guidelines or has been operated in a manner which is contrary to Tasman Sinkware's printed instructions;

PRODUCT SPECIFICATION

- Usage: For mains cold water only.
- Temperature Range: 2-38°C
- Min.-Max. Working Pressure:10-125 psi (0.7-8.6 bar)
- Service Flow Rate: 0–3 Litres per minute*
- Capacity: 9,450 litres*
- Rating: 1 micron
- Removes/Reduces: Chlorine, cysts, giardia, cryptosporidium, bad taste and odours, and all particles down to 1 micron in size
- This filter does not remove fluoride
- Filter Change: Annually or sooner if flow rate becomes inconveniently slow.

** Subject to water quality and usage*

- The unit has not been installed in accordance with Tasman Sinkware's printed instructions and has not been installed in compliance with all applicable laws, regulations and industry standards;
- The unit has not been used in accordance with the manufacturer's instructions;
- The unit does not meet the conditions for use described in the owner's manual or performance data sheet for this unit
- You use accessories or components which do not meet Tasman Sinkware's specifications as set out in the Owners Manual;
- The defect, fault or failure is due to normal wear and tear;
- The defect, fault or failure has occurred where the unit has been used reasonably or has reached its serviceable life;
- The serial or model number label of the unit is removed or defaced;
- The unit is serviced, modified, altered or repaired by an unauthorized or unqualified person;

How to make a claim under this warranty:

To make a claim under this warranty you must contact Tasman Sinkware within 21 days of the defect, fault or failure occurring. Tasman Sinkware's Warranty Contact number is 1300 13 7465. At the time of repair or replacement under your warranty claim you must provide to Tasman Sinkware:

- Proof that you purchased the unit from an authorized retailer or dealer within the warranty time; and
- A copy of a certificate which certifies that the unit was installed in compliance with our printed installation instructions and all applicable laws, regulations and industry standards. Tasman Sinkware will only pay for repair or replacement upon receipt of proof of your purchase showing the date of purchase.

Limitation of Liability of Tasman Sinkware under this warranty:

Where a warranty exists or is implied by law, Tasman Sinkware liability is limited (to the extent that it can be limited) to repair or replacement of the faulty Replaceable Element or the unit or an equivalent unit. Tasman Sinkware may, in its discretion, choose whether it shall repair or replace any unit or Replaceable Element or Tasman Sinkware may choose to pay to you the cost of replacing the Replaceable Element or the unit or the cost of having the unit repaired. To the extent permitted by law, Tasman Sinkware assumes no liability whatsoever and disclaims all liability for direct, indirect or consequential loss, or special, general or other damage or expense caused by or arising out of:

- Any failure to install or use the unit in accordance with the Manufacturer's Instructions, the Installation and Operating manual or Tasman Sinkware's printed instructions; or

- The purpose for which you are purchasing the unit.

You acknowledge that the quality of water supplied and your water usage rate and influent water pressure may vary seasonally or over a period of time.

In addition to this water characteristics can differ if the unit is relocated or the environment changes.

You acknowledge that Tasman Sinkware does not know your requirements and cannot and does not warrant that the unit is fit for the purpose for which you intend to use the unit or is appropriate for the purpose for which you intend to use the unit. Tasman Sinkware does not authorize others to assume any obligation on its behalf even if you inform them of the purpose for which you intend to use this unit.

WARNING Tasman Sinkware does not recommend making alterations to your existing plumbing to accommodate this filter system. If you wish to modify existing plumbing you must comply with AS 3500 and use a licensed plumber. Where internal water pressure exceeds 860 kPa a Watermark approved Pressure Limiting Valve must be installed prior to the filter system.

WARNING The contaminants or other substances removed or reduced by this water treatment system are not necessarily in your water supply. Do not use with water that is microbiologically unsafe or of an unknown quality without disinfection before or after the system.

IMPORTANT This filter is designed to be used with mains/city water supplies.

CAUTION Safely isolate the water supply prior to installing the filter system to avoid injury and property damage.

Our goods come with guarentees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have all the goods repaired or replaced if the good fails to be of acceptable quality and the failure does not amount to a major failure.

Refer to oliveri.com.au for warranty details.