

Raymor

Installation Instructions 3 FUNCTION 3STAR Product Code: 167787/167788

General Note: This product is to be installed by a licensed plumber, installation must comply with AS/NZS 3500 and local plumbing codes.

Pressures:
Maximum Hydrostatic Pressure - 500 kpa. (As per AS/NZS3500)
Minimum Hydrostatic Pressure - 100 kpa
Maximum Water temperature 65°C

Installation:
All Showers connect to 1/2" BSP. A typical installation requires 10mm of male 1/2" BSP thread protruding from the finished wall, plus the thickness of any wall disc's. Seal threaded connection with thread tape.

The WELS compliant Water Mark flow controller has been preassembled in the end of the Shower hand piece or Shower Head, to comply with WELS the flow regulator must remain in place.

Cleaning instructions:
The Shower is to only be cleaned with warm soapy water.
Under No Circumstances should any abrasive, cream or acid based cleaning agents be used as these types of cleaners will damage the finish, Shower head plastic and rubber components and seals.

Issue Date:4th November 2019
Revision Number:V1.0
Revision Date:N/A

Raymor

Installation procedure:

- No.1 Mark the wall with the required centre to centre position of the shower rail wall brackets.
- No.2 Take out the white wall support .Drill holes to fix the support to the wall, use the wall plugs and screws supplied or a suitable wall plug and screw for the wall material.
- No.3 Loosen and remove upper wall bracket.
- No.4 Slide the hand shower holder and soap dish onto the shower rail.
- No.5 Adjust the distance of wall brackets to fit with support, screw the wall brackets onto tube.
- No.6 Firmly push the wall brackets into the white support.


Fitting wall elbow, Shower hose and Hand piece

- No.1 Apply sufficient thread seal tape to the 1/2"BSP thread.

N.B Do not overload thread as this will put undue pressure on the

Inlet Wall Elbow

- No.2 Screw wall Elbow to 1/2" BSP thread.
- No.3 Screw Shower hose to wall elbow ensuring sealing washer is in place.
- No.4 Screw hand piece to Shower hose ensuring flow regulator is in the Hand piece and sealing washer is in the hose.

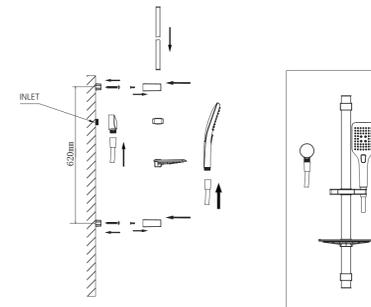

Warranty

For continued piece of mind, this product comes with a limited warranty from date of purchase. For full warranty terms and conditions of the warranty including how to claim and your rights as a consumer, please consult www.raymor.com.au. "If you are a consumer as defined under the Australian Consumer Law, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure."

Warranty contact details:

Tradelink Pty Ltd
ABN: 2900003832
1031 Nudgee Rd
Banyo QLD 4014
Ph: 1300 658 277
Warranty@Tradelink.com.au

