


DIVERTER FUNCTION
Press Button operation

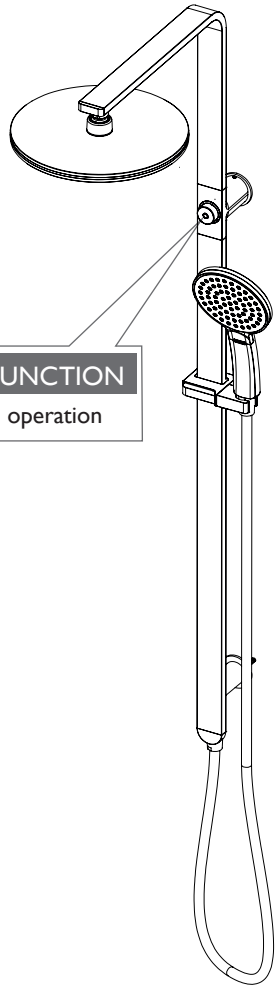

1

Shower Wall Outlet hole 25mm diameter

700-780mm Adjustment

2 x 6mm diameter holes 30mm deep

12mm

2

Apply teflon tape

O Ring

Dress Plate

Threaded Adaptor

Fit Dress Plate and O Ring over Wall Outlet. Screw threaded adaptor to wall outlet. Tighten firmly with allen key

Push plastic plug into drilled hole. Locate lower mounting adaptor over hole and firmly screw in place.

3

Insert Shower Arm into Diverter Body. Fasten with supplied screw. Tighten firmly.

Insert bottom pillar into rail and adjust to required height. Tighten with screwdriver.

4

Position Shower Rail over Wall Inlet Adaptor and lower Wall Inlet Adaptor and gently push in place. Fasten Shower rail by tightening top and bottom grub screws.

5

Insert Rubber Washer and Flow Restrictor as shown into Shower Rose. Screw Shower Rose to arm.

Rubber Washer

Flow Restrictor

6

Insert Rubber Washer and Flow Restrictor as shown into Shower Hose. Screw Shower Hose to Hand Shower and Shower Rail



Rubber Washer

Flow Restrictor

Test and check for leaks

recommended working pressure
150-500 KPa

maximum hot water temperature
75 degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements. Showers may not be suitable for use within:
- Gravity-fed water systems

• Pressure supply less than 150kPa;
NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

Failure to comply with the above may void all warranties.

WARRANTY:
Please refer to the full warranty statement enclosed with the product before installing. Or visit www.phoenixtapware.com.au to download a

MAINTENANCE AND CARE:

- Products should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:
While we aim to ensure the specifications shown are correct at the time of printing, Phoenix Tapware reserves the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.