



HYDROTAP G5 B ARC GUNMETAL



BOILING

FILTERED

Order Code H52786Z09AU

Zip HydroTap Design Range Boiling, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, and 0.2 micron water filtration.



Manufacturing Code	H52786Z09AU
--------------------	-------------


Capacity	Residential
----------	-------------

Tap	Zip HydroTap Design Range ARC Tap (Gunmetal)
Water Pressure	Min 170kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.35kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D313mm x H333mm
Product Approvals	WaterMark, RCM
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)


Installation Requirements

Installation Detail

Ventilation requirements Contact your local service provider if ventilation is not suitable


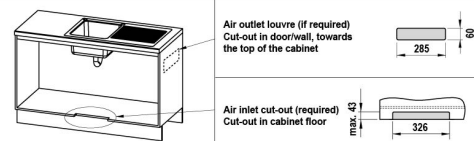


Ø35mm hole for HydroTap Tap

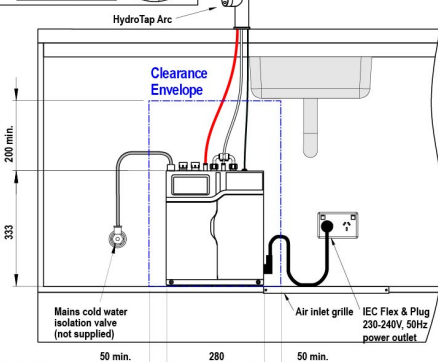

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

HydroTap Arc Tap

with Arc Tap
162

Technical drawing of the Font ArcCube showing dimensions and hole locations. The drawing includes the following labels and dimensions:

- 3-off, $\varnothing 10$ holes @ 155mm PCD, equispaced
- $\varnothing 140$ hole for bowl
- $\varnothing 176$ outline of Font
- 174 for HydroTap ArcCube
- 120°
- $\varnothing 35$ hole for tap

HydroTap G5
B Home, B60, B100
BA Home, BA60, BA100
shown with HydroTap Arc

