



HYDROTAP G5 BCSHA CELSIUS ALL-IN-ONE ARC BRUSHED ROSE GOLD

**BOILING**

**CHILLED**

**SPARKLING**

**HOT & AMBIENT**

FILTERED

UNFILTERED

Order Code H57783Z05AU

Zip HydroTap Design Range CELSIUS All-In-One Boiling, Chilled & Sparkling Filtered water, plus Hot and Cold washing up water from a single tap (hot and cold water supply required). The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.



Manufacturing Code	H57783Z05AU
Capacity	Residential

Tap	Zip HydroTap Design Range CELSIUS All-In-One ARC Tap (Brushed Rose Gold)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold and Hot
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.8kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W339mm x D460mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Wels Rating	5 Star, 6.0 litres


5 years (appliance warranty 36 months plus additional 24 months tank warranty)

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com'

BKL2 HydroTap G5 v1.00 02.21 BCS BCS20

Ventilation requirements


Position the Tap and the Command Centre as close together as possible.

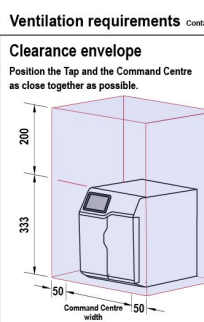

200
333
50
50
Command Centre width


Clearance envelope

Air outlet louvre (if required)
Cut-out in door/wall, towards the top of the cabinet



285
60
max 43


Air inlet cut-out (required)
Cut-out in cabinet floor



326
max 43

Tap Positioning


Position the Tap to dispense into the sink, allowing clearance for a cup or teapot.

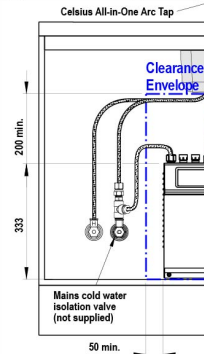

50mm hole for Tap
Sink
440
440
200 min.
333
50 min.
339
50 min.


HydroTap Tap options

Celsius All-in-One Arc Tap

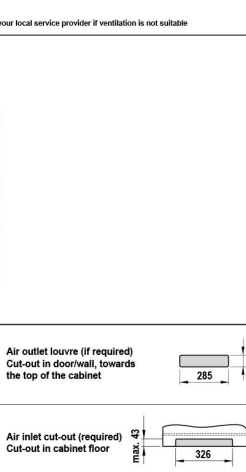

314
226
Boiling & Chilled Outlet
220
Hot & Cold Outlet
440
52
151
50
258
255
85

Classic Plus All-in-One Tap

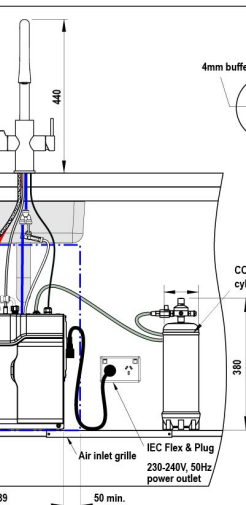

278
254
211
193
340
48
234


Classic All-in-One Tap



278
254
211
193
332
48
234
110
71

Mains hot water supply installation

Hot and cold water supply required

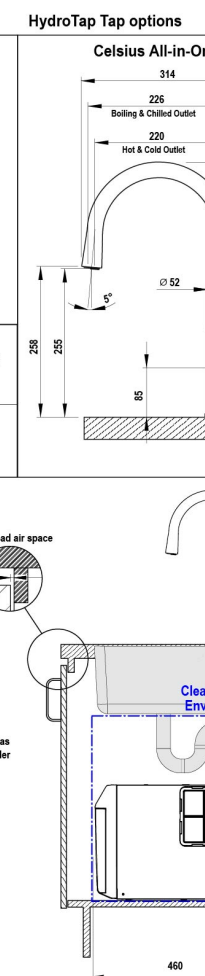

50mm hole in sink/benchtop for All-in-One tap
BLUE marked braided hose to HydroTap Command Centre MAINS inlet
RED marked braided hose to mixer tap
Hot water isolation valve (not supplied)
Mains water isolation valve (not supplied)

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

Tap Detail

